

CTY16 电流互感器

CTY16 current transformer

产品特点 Features


- ◆ PC/ABS 外壳，耐高温，耐腐蚀；环氧树脂灌封，隔离性能好，抗冲击性强；体积小，外形美观，安装方便；线性好，精度高，线性范围宽，一致性好。用于进行电量采集及对电量的监测。

PC/ABS case-resistance to high temperature and corrosion; Epoxy risen-perfect isolation and resistance to strong impact; Small in size and pleasant to eyes easy installation; Excellent linearity and isolation, high precision, wide in linearity range and overall consistency. used for the electric quantity collection and power monitoring.

主要技术参数 Main parameters

型号 Model	额定输入/输出 Rated input/output	准确级 Accuracy	绝缘电阻 Insulation resistance	角差 Angle difference	负载电阻 Load resistance	隔离耐压 Isolated withstand voltage	穿线孔径 Threading aperture
CTY16-2k5-60	60A/24mA	0.2	$\geq 100\text{Mohm}$	$\leq 10'$	$\leq 30\Omega$	3.0kV	$\Phi 16\text{mm}$
CTY16-2k5-100	100A/40mA	0.2	$\geq 100\text{Mohm}$	$\leq 10'$	$\leq 30\Omega$	3.0kV	$\Phi 16\text{mm}$
CTY16-2k5-160	160A/64mA	0.2	$\geq 100\text{Mohm}$	$\leq 10'$	$\leq 30\Omega$	3.0kV	$\Phi 16\text{mm}$

产品规格 Specification (尺寸单位 Dimension unit: mm)

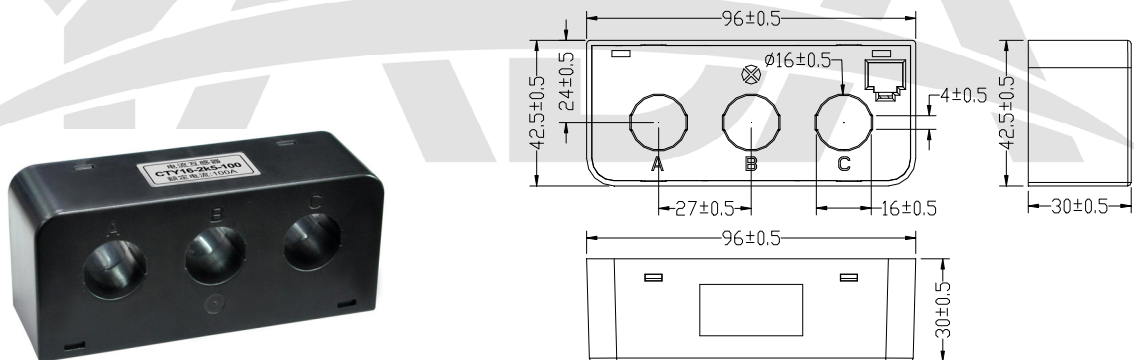

安装方式 Installation

扎带固定 Bandage fixation	螺钉固定 Screw fixation	导轨固定 Guideway fixation


地址Add: 广东省河源市高埔岗雅达工业园 YADA Industrial Park, Gaopugang, Heyuan City, Guangdong

邮编POST: 517000

Web: <https://www.yada-electronics.com>

Tel/Whatsapp/Wechat: +86 13827882119 / +86 13690919990

E-mail: info@yada-electronics.com / sale@yada.com.cn

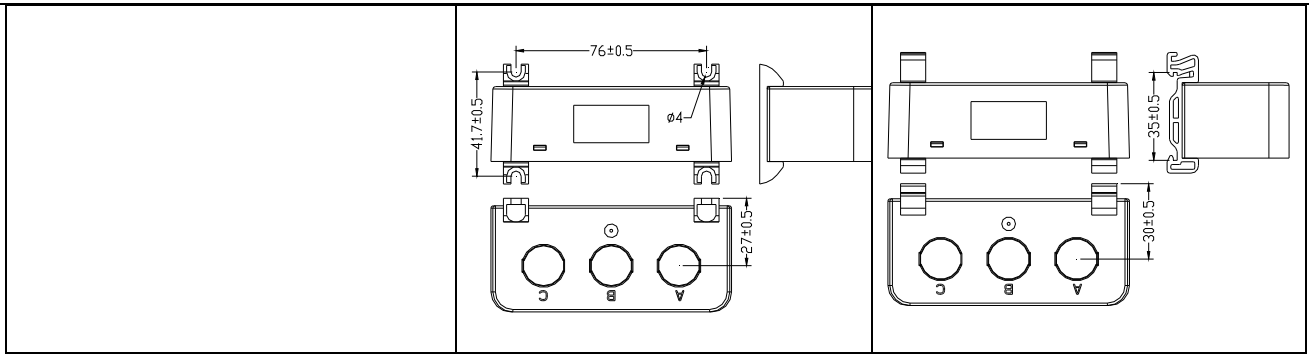**说明 Note**

- 使用温度 Operating temperature: $-40^{\circ}\text{C}\sim 50^{\circ}\text{C}$; 贮存温度 Storage temperature: $-40^{\circ}\text{C}\sim 75^{\circ}\text{C}$;
- 相对湿度 Relative humidity: 10%~95%RH;
- 上表所列常用规格, 还可根据客户要求另行设计。The products are customized according to user's requirements.

注: 以上图片仅供参考, 产品以实物为准,

Note: The above pictures are for reference only, the products are subject to the actual product,

版权所有, 保留一切权利。内容如有改动, 恕不另行通知。

Copyright, all rights reserved. Specification subject to change without prior notice.

