

CT16L 电流互感器(PH2.54 端子式)

CT16L current transformer(PH2.54 terminal type)

产品特点 Features


- ◆ PC/ABS 外壳，耐高温，耐腐蚀；环氧树脂灌封，隔离性能好，抗冲击性强；体积小，外形美观，安装方便；线性好，精度高，线性范围宽，一致性好。用于进行电量采集及对电量的监测。

PC/ABS case-resistance to high temperature and corrosion; Epoxy risen-perfect isolation and resistance to strong impact; Small in size and pleasant to eyes easy installation; Excellent linearity and isolation, high precision, wide in linearity range and overall consistency. Used for the electric quantity collection and power monitoring.


主要技术参数 Main parameters

型号 Model	额定输入/输出 Rated input/output	准确级 Accuracy	绝缘电阻 Insulation resistance	角差 Angle difference	负载电阻 Load resistance	隔离耐压 Isolated withstand voltage	穿线孔径 Threading aperture (mm)
CT16L	5A/10mA(2T)	0.5	≥100Mohm	≤15'	≤20Ω	3kVac	Φ16
	50A/20mA	0.2		≤10'	≤30Ω		
	60A/24mA	0.2		≤10'	≤30Ω		
	100A/40mA	0.2		≤10'	≤30Ω		
	50A/10mA	0.2		≤10'	≤30Ω		
	100A/20mA	0.2		≤10'	≤30Ω		

产品规格 Specification (尺寸单位 Dimension unit: mm)

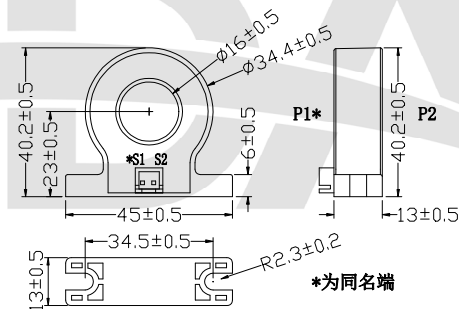

安装方式 Installation



螺钉固定 fix with screw

说明 Note

- 使用温度 Operating temperature: -40℃~65℃； 贮存温度 Storage temperature: -40℃~75℃；
- 相对湿度 Relative humidity: 10%RH~95%RH；
- 上表所列 of 常用规格，还可根据客户要求另行设计。The products are customized according to user's requirements.

注：以上图片仅供参考，以实际出货为准，

Note: The above picture is for reference only, subject to the actual shipment,

版权所有，保留一切权利。内容如有改动，恕不另行通知。

Copyright, all rights reserved. Specification subject to change without prior notice.